

THE FIRST ZENITHAL SUNPROTECTION WITH FIXSCREEN® - TECHNOLOGY

TOPFIX®

- Horizontal or inclined sunprotection for your roof window, light panel or skylight
- Wind-resistant in any position
- Can be used for insect protection and blackout when fitted directly to your window frame
- Compact design
- Patented technology



DESCRIPTION


RENSON SUNPROTECTION SCREENS introduces the TOPFIX®: zenithal sunprotection using a revolutionary new technology: a combination of our well-known FIXSCREEN® technology and a DYNEEMA® tension system. The result is exceptional fabric tension. Flapping and ruptured fabrics are a thing of the past. The compact box fits perfectly within every design.

The zenithal sunprotection prevents overheating in light panels, skylights and small conservatories. Complete blackout is possible by means of blackout fabrics whether used inside or outside.




PRODUCT

- Sunprotection with excellent fabric tension
- Intelligent wind-resistant guide system using FIXSCREEN®-technology
- Motor control
- Compact design
- Frames available anodised or powdercoated in any RAL colour
- Soltis® polyester fabric in a wide range of colours or Soltis® blackout polyester fabric.

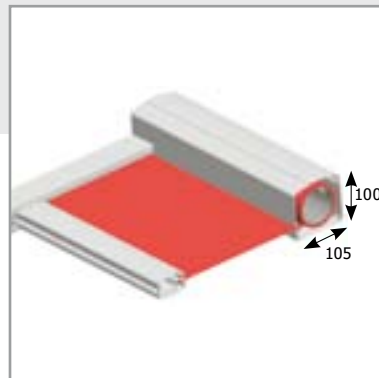


APPLICATIONS

- For all kinds of horizontal or inclined glazing: such as light panels, sloping or pitched roofs, skylights, conservatories, etc.
- For all window types: aluminium, wood, PVC.
- For new buildings as well as renovation projects.
- For private homes and public buildings: hospitals, care homes, offices, schools, etc.
- Top-bottom or bottom-top fitting.
- Suitable for inside and outside use.

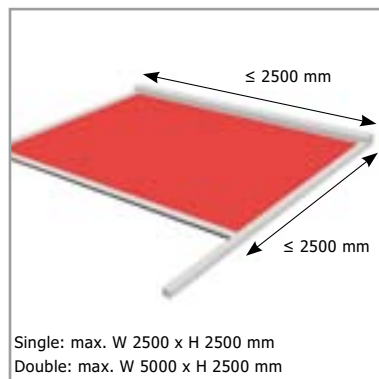

TECHNICAL FEATURES

- Maximum dimensions:
Single: W 2500 x H 2500
Double: W 5000 x H 2500
- Aluminium frame: W 105 x H 100
- Inclination from 0° to 90°. A minimum slope is required when used with Soltis® blackout polyester fabric.
- Wind tunnel test by Von Karman Institute: No. EAR0852
- When closed, resistant to wind speeds up to 120km/h.

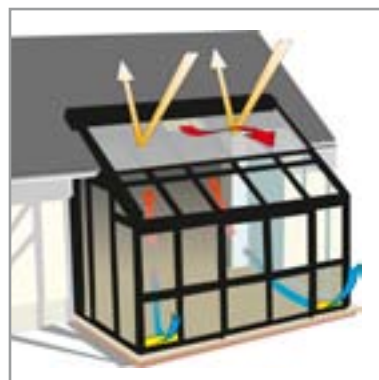

© Renson Ventilation NV, Waregem, 2008

All rights reserved. No part of this publication may be reproduced, stored in an automated retrieval system or made available in any form or in any way, whether electronic or mechanical, including photocopying, recording or any other manner without the prior written permission of the author.

RENSON reserves the right to make technical changes to the products shown. Renson meets the EPB standard.

HEADQUARTERS: KESTELYN NV (Renson Sunprotection Screens) • IZ 1 Flanders Field • Kalkhoevestraat 45 B-8790 Waregem • Tel. +32 (0)56 62 65 00 • Fax +32 (0)56 62 65 09 • export@renson.net • www.renson.eu
RENSON Fabrications LTD • Fairfax Units 1-5 • Birchholt Road • Parkwood Industrial Estate Maidstone • Kent ME15 9SF • Tel. 01622/754123 • Fax 01622/689478 • Fax 01622/689479 • info@rensonuk.net • www.renson.eu